


UCP-GEHÜSE-EINHEITEN

UCP HOUSING UNITS

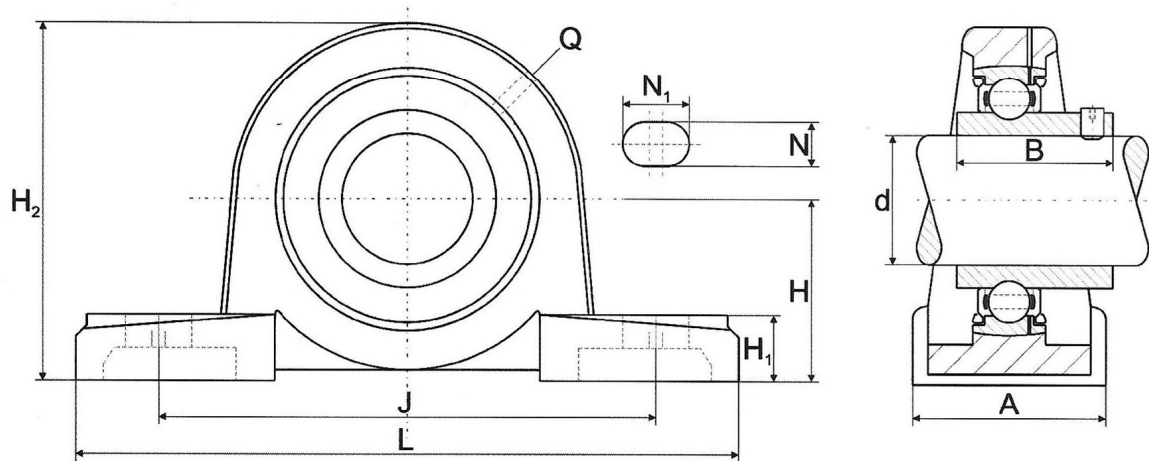


Bezeichnung Code	Dimensionen Dimensions											Gewicht Weight
SWC	d	H	J	L	A	H ₁	H ₂	N	N ₁	B	Q	≈ [kg]
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		
UCP204	20	33,3	95	127	38	14	65	13	19	31,0	M6	0,65
UCP204-12	19,050	33,3	95	127	38	14	65	13	19	31,0	M6	0,66
UCP205	25	36,5	105	140	38	15	71	13	19	34,1	M6	0,79
UCP205-16	25,400	36,5	105	140	38	15	71	13	19	34,1	M6	0,79
UCP206	30	42,9	121	165	48	17	83	17	21	38,1	M6	1,29
UCP206-18	28,575	42,9	121	165	48	17	83	17	21	38,1	M6	1,31
UCP207	35	47,6	127	167	48	18	93	17	21	42,9	M6	1,55
UCP207-20	31,750	47,6	127	167	48	18	93	17	21	42,9	M6	1,60
UCP208	40	49,2	137	184	54	18	98	17	21	49,2	M6	1,84
UCP208-24	38,100	49,2	137	184	54	18	98	17	21	49,2	M6	1,89
UCP209	45	54,0	146	190	54	20	106	17	21	49,2	M6	2,20
UCP209-28	44,450	54,0	146	190	54	20	106	17	21	49,2	M6	2,21
UCP210	50	57,2	159	206	60	21	114	20	25	51,6	M6	2,77
UCP210-30	47,625	57,2	159	206	60	21	114	20	25	51,6	M6	2,85
UCP211	55	63,5	171	219	60	23	126	20	25	55,6	M6	3,41
UCP211-32	50,800	63,5	171	219	60	23	126	20	25	55,6	M6	3,56
UCP212	60	69,8	184	241	70	25	138	20	25	65,1	M6	4,62
UCP212-36	57,150	69,8	184	241	70	25	138	20	25	65,1	M6	4,75
UCP213	65	76,2	203	265	70	27	151	25	27	65,1	M6	5,57
UCP213-40	63,500	76,2	203	265	70	27	151	25	27	65,1	M6	5,66

Informationen zu anderen Ausführungen auf Anfrage.

Information on other designs are available on request.

UCFL-GEHÜSE-EINHEITEN

UCFL HOUSING UNITS


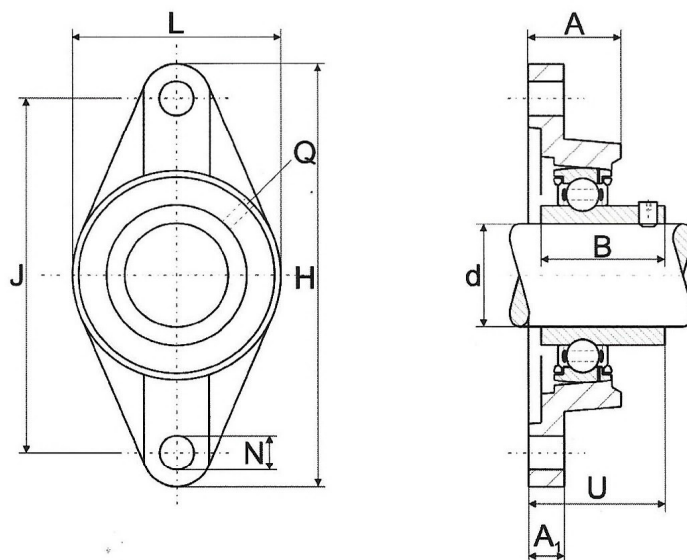


Code SWC	Dimensions										Weight ≈ [kg]
	d	H	J	L	A	A ₁	N	B	U	Q	
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		
UCFL204	20	113	90	60	25,5	12	12	31,0	33,3	M6	0,42
UCFL204-12	19,050	113	90	60	25,5	12	12	31,0	33,3	M6	0,43
UCFL205	25	130	99	68	27	15	16	34,1	35,8	M6	0,64
UCFL205-16	25,400	130	99	68	27	15	16	34,1	35,8	M6	0,64
UCFL206	30	148	117	80	31	14	16	38,1	40,2	M6	0,88
UCFL206-18	28,575	148	117	80	31	14	16	38,1	40,2	M6	0,90
UCFL207	35	161	130	90	34	16	16	42,9	44,4	M6	1,21
UCFL207-20	31,750	161	130	90	34	16	16	42,9	44,4	M6	1,27
UCFL208	40	175	144	100	36	16	16	49,2	51,2	M6	1,48
UCFL208-24	38,100	175	144	100	36	16	16	49,2	51,2	M6	1,53
UCFL209	45	188	148	108	38	18	19	49,2	52,2	M6	1,95
UCFL209-28	44,450	188	148	108	38	18	19	49,2	52,2	M6	1,97
UCFL210	50	197	157	115	40	18	19	51,6	54,6	M6	2,23
UCFL210-30	47,625	197	157	115	40	18	19	51,6	54,6	M6	2,30
UCFL211	55	224	184	130	43	20	19	55,6	58,4	M6	2,87
UCFL211-32	50,800	224	184	130	43	20	19	55,6	58,4	M6	3,02
UCFL212	60	250	202	140	48	20	23	65,1	68,7	M6	3,96
UCFL212-36	57,150	250	202	140	48	20	23	65,1	68,7	M6	4,10
UCFL213	65	258	210	155	50	24	23	65,1	69,7	M6	4,69
UCFL213-40	63,500	258	210	155	50	24	23	65,1	69,7	M6	4,78

Informationen zu anderen Ausführungen auf Anfrage.

UCF-GEHfUSEEINHEITEN

UCF HOUSING UNITS

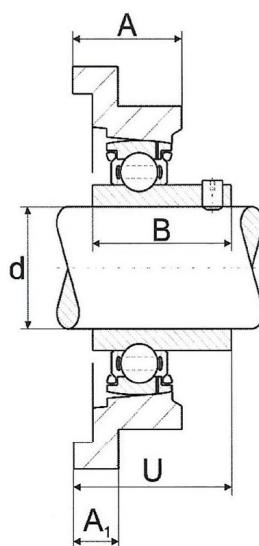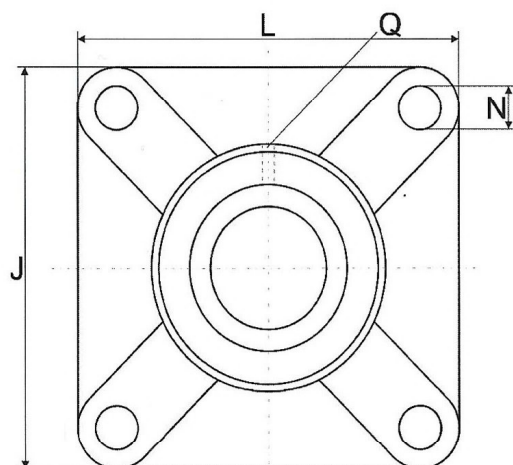


Code SWC	Dimensions									Weight ≈ [kg]
	d	J	L	A	A ₁	N	B	U	Q	
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		
UCF204	20	64	86	25,5	12	12	31,0	33,3	M6	0,57
UCF204-12	19,050	64	86	25,5	12	12	31,0	33,3	M6	0,58
UCF205	25	70	95	27	14	12	34,1	35,8	M6	0,85
UCF205-16	25,400	70	95	27	14	12	34,1	35,8	M6	0,84
UCF206	30	83	108	31	14	12	38,1	40,2	M6	1,11
UCF206-18	28,575	83	108	31	14	12	38,1	40,2	M6	1,13
UCF207	35	92	117	34	16	14	42,9	44,4	M6	1,50
UCF207-20	31,750	92	117	34	16	14	42,9	44,4	M6	1,55
UCF208	40	102	130	36	16	16	49,2	51,2	M6	1,91
UCF208-24	38,100	102	130	36	16	16	49,2	51,2	M6	1,95
UCF209	45	105	137	38	18	16	49,2	52,2	M6	2,30
UCF209-28	44,450	105	137	38	18	16	49,2	52,2	M6	2,32
UCF210	50	111	143	40	18	16	51,6	54,6	M6	2,56
UCF210-30	47,625	111	143	40	18	16	51,6	54,6	M6	2,63
UCF211	55	130	163	43	20	19	55,6	58,4	M6	3,31
UCF211-32	50,800	130	163	43	20	19	55,6	58,4	M6	3,46
UCF212	60	141	175	48	20	19	65,1	68,7	M6	4,25
UCF212-36	57,150	141	175	48	20	19	65,1	68,7	M6	4,10
UCF213	65	149	187	50	20	19	65,1	69,7	M6	4,91
UCF213-40	63,500	149	187	50	20	19	65,1	69,7	M6	5,00

Informationen zu anderen Ausführungen auf Anfrage.

SPANNLAGER

RADIAL INSERT BALL BEARINGS

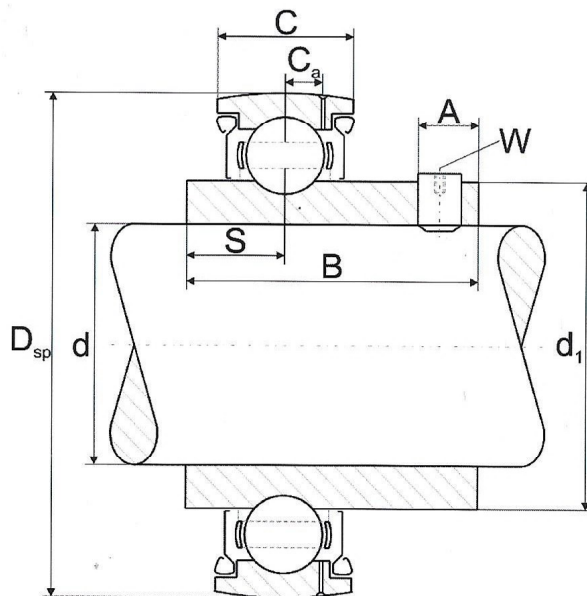

Bezeichnung Code	Dimensionen Dimensions									Tragzahlen Load Ratings		Maximale Drehzahl Maximum speed			Gewicht Weight
	d	D _{sp}	C	B	S	d ₁	C _a	A	W	C _r	C _{0r}	2ZR	T250	HT	
SWC	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kN]	[kN]	[min ⁻¹]	[min ⁻¹]	[min ⁻¹]	≈ [kg]
UC204	20	47	17	31,0	12,7	27,56	4,2	5	3	12,8	6,6	8 000	8 000	140	0,15
UC204-12	19,500	47	17	31,0	12,7	27,56	4,2	5	1/8	12,8	6,6	8 000	8 000	140	0,16
UC205	25	52	17	34,1	14,3	33,83	4,2	5	3	14,0	7,8	7 200	7 200	130	0,20
UC205-16	25,400	52	17	34,1	14,3	33,83	4,2	5	1/8	14,0	7,8	7 200	7 200	130	0,19
UC206	30	62	19	38,1	15,9	40,20	5,0	5	3	19,5	11,3	6 000	6 000	110	0,31
UC206-18	28,575	62	19	38,1	15,9	40,20	5,0	5	1/8	19,5	11,3	6 000	6 000	110	0,33
UC207	35	72	20	42,9	17,5	46,84	5,7	7	4	25,5	15,3	5 000	5 000	90	0,47
UC207-20	31,750	72	20	42,9	17,5	46,84	5,7	7	5/32	25,5	15,3	5 000	5 000	90	0,52
UC208	40	80	21	49,2	19,0	52,27	6,2	8	4	32,5	19,8	4 500	4 500	80	0,62
UC208-24	38,100	80	21	49,2	19,0	52,27	6,2	8	5/32	32,5	19,8	4 500	4 500	80	0,66
UC209	45	85	22	49,2	19,0	57,91	6,3	8	4	32,5	20,4	4 300	4 300	80	0,69
UC209-28	44,450	85	22	49,2	19,0	57,91	6,3	8	5/32	32,5	20,4	4 300	4 300	80	0,71
UC210	50	90	24	51,6	19,0	62,84	6,5	10	5	35,0	23,2	3 800	3 800	70	0,80
UC210-30	47,625	90	24	51,6	19,0	62,84	6,5	10	3/16	35,0	23,2	3 800	3 800	70	0,87
UC211	55	100	25	55,6	22,2	69,77	7,0	10	5	43,5	29,0	3 400	3 400	60	1,07
UC211-32	50,800	100	25	55,6	22,2	69,77	7,0	10	3/16	43,5	29,0	3 400	3 400	60	1,22
UC212	60	110	27	65,1	25,4	76,48	7,4	10	5	52,0	36,0	3 200	3 200	50	1,49
UC212-36	57,150	110	27	65,1	25,4	76,48	7,4	10	3/16	52,0	36,0	3 200	3 200	50	1,62
UC213	65	120	28	65,1	25,4	80,85	8,2	12	6	57,0	40,0	3 000	3 000	50	1,73
UC213-40	63,500	120	28	65,1	25,4	80,85	8,2	12	1/4	57,0	40,0	3 000	3 000	50	1,82

Informationen zu anderen Ausführungen auf Anfrage.

Information on other designs are available on request.